


4. GETTING STARTED

4.1. Attaching the hoses

- 4.1.1. Remove the protective caps before attaching hoses (fig. 2).
- 4.1.2. Straighten the suction hose 8 and the drain hose 10.
- 4.1.3. Install the suction hose (ø6mm) 8 onto the suction hose connector 7 .
- 4.1.4. Install the drain hose (ø12mm) 10 onto the drain hose connector 6 .
- 4.1.5. Secure both hoses 8, 10 with the supplied hose clamps 9 .
- 4.1.6. Pay attention to the pumping direction on the appliance. Make sure that the hoses are straightened to avoid damage

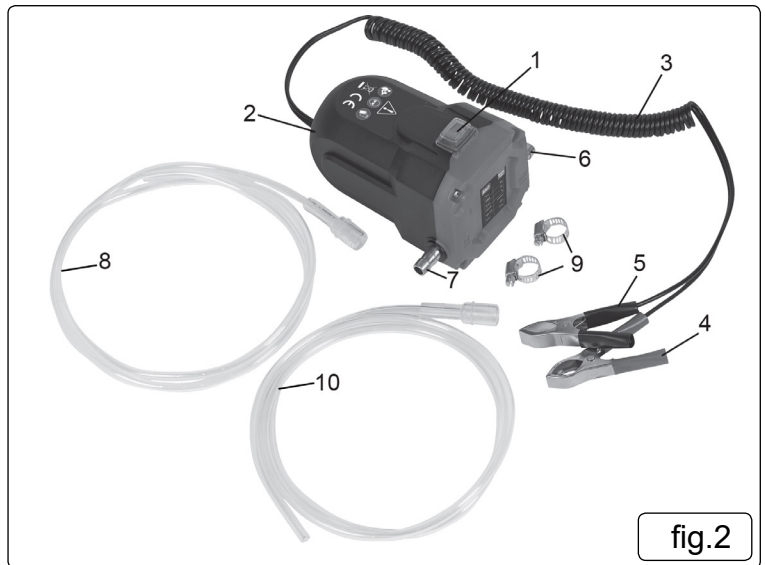

5. OPERATION

- 5.1. Start the vehicle and run it for 5-10 minutes to warm up the oil (60 °C is the maximum oil temperature). This reduces viscosity of the oil and enables to pump it out more efficiently.
 - WARNING! DO NOT** pump the oil when the car engine is running.
- 5.2. Gently insert the suction hose (ø6mm) 8 into the bottom of the oil pan.
- 5.3. Insert the drain hose (ø12mm) 10 into a container (e.g. oil collecting tray).
- 5.4. Set the on/off switch 1 to "O" (off) position.
- 5.5. Connect the positive pole clamp (red) 4 to the positive pole (+) of the vehicle battery.
- 5.6. Connect the negative pole clamp (black) 5 to the negative pole (-) of the vehicle battery.
- 5.7. Turning on: Set the on/off switch 1 to "I" position. The pumping begins after a short suction period.
- 5.8. Turning off: Set the on/off switch 1 to "O". Turn the appliance off as soon as oil extraction is over or after 30 minutes of continuous operation.
- 5.9. After each use, pump through some fresh oil to clean the appliance.
- 5.10. Disconnect both clamps 4, 5 from the vehicle battery.
 - WARNING!** To prevent damage let the appliance cool for at least 10 minutes after every 30 minutes of continuous operation.

6. MAINTENANCE

- WARNING!** During cleaning or operation **DO NOT** immerse the electrical parts of the appliance in water or other liquids. Never hold the appliance under running water.
- 6.1. **Cleaning**
 - 6.1.1. After each use, pump through some fresh oil to clean the appliance.
 - 6.1.2. Clean both clamps 4, 5 with a dry cloth after each use. Make sure there is no adhering battery fluid left on the appliance.
 - 6.1.3. Keep the casing 2 and accessories clean. **DO NOT** use abrasive, aggressive or chemical cleaning agents to clean the surface of the appliance.
 - 6.1.4. In case of oil spillage, clean it with a soft cloth or a paper towel.
 - 6.1.5. Before each use check the appliance and all its accessories for any visible damage. Apart from the occasional cleaning, the appliance is maintenance-free.
 - 6.1.6. When not in use, store the cleaned appliance in a dry, secure location away from children.



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

UK Distributor: JRP Distribution, UNIT10-A, Chichester Business Park, City Fields Way, Tangmere, W. Sussex, PO20 2FT



01903750355



01903752121



sales@jrpdistribution.co.uk



www.jrpdistribution.co.uk